

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

**Intyg
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Trimble AB, Danderyd SE
Applicant (s)

(21) Patentansökningsnummer 0201882-8
Patent application number

(86) Ingivningsdatum 2002-06-19
Date of filing

REC'D 03 JUL 2003

WIPO PCT

Stockholm, 2003-06-25

För Patent- och registreringsverket
For the Patent- and Registration Office


Sonia André

Avgift
Fee

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

67182-2002-06-13

1

MULTIPLE OPTICAL CHANNELS

FIELD OF THE INVENTION

The present invention generally relates to an automatic survey instrument comprising a source of structured light for transmitting a beam of said light towards said object, a receiver adapted to receive said reflected structured light beam when reflected from said object, said received light being co-axial with the transmitted light, an objective lens and a reticle with optical means positioned there-between, said objective lens and said reticle defining an optical axis. The invention more specifically relates to the arrangement for redirecting the reflected light in the receiver.

BACKGROUND ART

Automatic survey instruments of the present type comprise a telescope system where received light can be divide into separate channels for range-finding, tracking and viewing or manual aiming. The transmitter beam for the range-finder and for the tracker function are preferably coaxial to the receiver optics.

The light reflected from the target object, and received at the instrument is divided, depending upon the purpose, in light components of different wavelengths such as the light for tracking, range finding and visible light for viewing. By using the tracking light and range finding light thus divided, range finding and automatic tracking may be performed.

Such instruments, using more than one channel, according to the prior art, uses different types of prisms in the receiver with or without dichroic coatings for splitting/separating the beams into the different channels.

The word dichroic in this context refers to dichroic mirrors/prisms or coatings, which exhibit selective reflection and transmission of light as a function of wavelength regardless of its plane of vibration. A dichroic mirror thus selectively reflects

67182-2002-06-13

2

light according to its wave-length and transmits light having other wavelengths. The use of prisms, i.e. cubic prisms primarily requires long building lengths, problems in providing needed filters within the prisms and inherently high costs, in that the costs for producing the prisms are high.

5

Belonging to the related art are e.g. EP-1 081 459 and EP-0 987 517. In these discussions of problems related to the use of prisms can be found. In EP-0 987 517 e.g. the arrangement includes several prisms in which two beams having different wavelengths are separated using two dichroic prisms. In EP-1 081 459 prisms are disclosed, but also one dichroic plate is used for separating beams with different wavelengths; however, that plate is arranged perpendicular to the optical axis of the instrument, thus reflecting the light in the coaxial direction, while allowing other wavelengths to pass through the plate.

15 The use of prisms, however, introduces certain problems. Drawbacks are the fact the glass extends the optical path so the building length increases, the size of the prisms become large and the prisms are heavy. The requirements on parallelity between prisms surfaces are very high and making a dichroic filter within the glass is harder than on a surface between air and glass. All this means that the prisms become large and expensive and the telescope becomes larger and heavier. More advanced prism constructions can reduce building length but the costs further increases for providing the prisms and the complicated structure resulting therefrom. Additionally, the prisms make the apparatus larger and heavier causing other problems as increased power consumption, as when automatically tracking an object.

25

Examples of wavelengths used for visible light are in the range of 400 nm to 650 nm for collimating purposes. For range-finding visible light at 660nm or IR light at 850 nm can be used and for tracking IR light at 785 nm. These wavelength ranges are generally termed channels of a particular type such as visual channel, tracking channel etc.

30

67182-2002-06-13

3

DISCLOSURE OF THE INVENTION

The present invention intends to overcome the above mentioned problem by a solution which is both simple and inexpensive.

5

This object has been achieved by a automatic survey instrument of the initially defined kind, wherein tilted dichroic plates arranged primarily on the optical axis defined by the objective lens and the reticle of the instrument, which according to this invention preferably also coincides with the visual channel, i.e. the optical path for the visible light used when viewing the target through the apparatus. Secondary mirrors may be used to fold the optical paths within the apparatus. These secondary mirrors may be of the dichroic type.

Substituting prisms for separating the different channels with plates results in simpler components, simpler coatings and generally shorter telescope length. As referred to above with the use of prisms, the channels are separated and/or reflected by passage through the prism, entering the prism from air through a first surface and exciting the prism to air. During that process the light (IR or visual) is either reflected against second prism surface and thereafter exists the prism through a third surface of the prism or it is allowed to pass through the second surface. The resulting optical path within the prism may either be depending on the type of prism material used or in this case the second prism surface may have a dichroic coating. Depending on the desirability of short telescope lengths this will increase the complexity of the prisms.

25

According to the invention the prisms have been replaced by tilted dichroic plates and/or mirrors; however, one prism may be used in one of the optical paths. This results in simpler components, simpler coatings, lower costs, and shorter telescope lengths, as will be shown.

30

By using the tilted dichroic plates it is possible to reflect the different channels in a direction where the reflected beam is non-coaxial with the main optical axis of the apparatus and thus arrange for receivers or sensors placed adjacent to a volume as defined by the aperture and the focusing lens. The plates will, however, introduce optical aberrations in the beam passing through the plate, e. g. coma and astigmatism, as the plates by necessity have to have a certain thickness in order to be stable.

These effects may be compensated for in a number of ways, which will be shown in the different embodiments below.

- 10 - Making the plates slightly wedge-shaped will compensate the aberrations from the tilted plate. The wedge angle has to be chosen in relation to the tilt angle and the thickness of the plate. A person skilled in the art may, using an optical design program, optimize the wedge angle.
- A second method is to add a third plane-parallel compensating plate tilted around an axis perpendicular to the tilt axes of the first plates.
- 15 - Tilting two plane parallel plates around axes that are perpendicular to each other is a third manner in which to reduce the aberrations introduced by the tilt.

BRIEF DESCRIPTION OF THE DRAWINGS

20 Fig. 1a shows schematically a side view of a first embodiment according to the invention.

Fig. 1b shows a detail of Fig. 1a

Fig. 2a shows schematically a side view of a second embodiment according to the invention.

25 Fig. 2b shows schematically a detail of Fig. 2a of the definition of the wedge angle.

Fig. 3 shows schematically a side view of a third embodiment according to the invention.

Fig. 4a shows schematically a side view of a fourth embodiment according to the invention.

30 Fig. 4b shows schematically a detail of Fig. 4a in a top view.

Fig. 5 shows schematically a side view of a fifth embodiment according to the invention.

In the drawings like details are shown using corresponding reference numbers.

5 DETAILED DESCRIPTION OF THE EXEMPLARY PREFERRED EMBODIMENTS

In Fig 1 is shown a first preferred embodiment of an apparatus according to the invention in which an objective lens, 101a and 101b, defines an optical axis OA. On this axis is seen a focusing lens 104 and a reticle 105. The focusing lens 104 is movable as is known to the man skilled in the art for focusing of the incoming light on
10 the reticle. The image may be viewed through an eyepiece 106. Adjacent to the objective and preferably attached to the inside of the lens 101b, a prism 102 with a reflective surface 103 is arranged on the optical axis OA. The surface 103 of the prism 102 may have a dichroic coating 103. The purpose of this prism is to reflect the beams λ_1 and λ_2 of structured light from two transmitters 111 and 112 in the form of
15 sources of structured light, such as a laser or a Light Emitting Diode (LED), forming a transmitted light path through the prism 102, where the light is reflected out through the objective lens 101 towards a target. The prism shown is in the form of a 45°-90°-45° prism used as a "right-angle prism", i.e. the prism will turn the beam through a 90°-bend. This requires that the beams λ_1 and λ_2 arrive at the optical axis
20 perpendicular to said axis. This set-up simplifies the geometry. However this perpendicularity is not necessarily an essential element of the invention.

Both beams λ_1 and λ_2 exit the objective lens 101 coaxially as shown in the figure. In order to accomplish this, the transmitters have been arranged such that the beams λ_1
25 and λ_2 each are reflected in a respective dichroic mirror 113 and 114, directly or via a light guide, such that the thus reflected beam incident on the mirrors 113 and 114 form a coaxial beam hitting the prism 102, i. e. the beam λ_1 transmitted from the transmitter 111 is reflected in the mirror 113 and is transmitted through the mirror 114, while the beam λ_2 transmitted from the transmitter 112 is reflected in the mirror 114 thus forming a common optical path.
30

The light reflected from the target reaches the objective lens in the form of a beam composed of the transmitted wavelengths and normally broadened as to cover the total area of the objective lens. It will be understood that the prism 102 is small in relation to the area of the objective lens and thus will obstruct a relatively small part of the composed beam λ_1, λ_2 reflected by the target.

Two dichroic plates 121, 122 are arranged in a tilted manner in the reflected beam on the optical axis OA, between the prism 102 and the reticle 105. "Tilted" in this context should be taken to mean that the plates are arranged such as to not be perpendicular to the optical axis OA. Part of the beam having the wavelength λ_1 is reflected in the first tilted plate 121 towards a mirror 131, which reflects the beam towards a detector 141. Likewise the part of the beam, having the wavelength λ_2 is allowed to pass through the first plate 121 on to tilted plate 122 where it is reflected towards a second mirror 132 which reflects the beam towards a detector 142. The plates being tilted and not perpendicular to the beam. Also it is not required that the mirrors be perpendicular to the beam as is shown in the figure. The mirrors must of course be placed such as to deflect the beam in the direction of the receiver.

The two receivers (141,142) are arranged outside a beam path (109) as defined by the objective lens (101).

In this embodiment a further emitter 115 is indicated arranged perpendicular to the optical axis, which may emit light of a wavelength λ_3 . This may be used for some third reason e.g. as a visible beam to aid pointing to a target.

The tilt angle α is shown in Fig. 1b, which shows a detail of Fig. 1a. The tilt angle is defined as the angle between the normal N_1, N_2 to the plate and the optical axis OA.

67182-2002-06-13

7

The axis around which the plate is tilted e.g. the axis indicated as 150, defines a tilt direction will be shown below to be of interest.

In Fig. 2a a second embodiment according to the invention is shown in which like numbers are used to indicate corresponding details. The lens system 201, the prism 202, the focusing lens 204, the reticle 205, the eyepiece 206 and the optical axis AO are similar to each other and serve essentially the same purposes.

In this second embodiment transmitter 211, transmitting light of the wavelength λ_1 , is arranged as in the first embodiment. The second transmitter 212 transmitting light of the wavelength λ_2 , is arranged in the same manner as transmitter 115 in the first embodiment, making one dichroic mirror superfluous.

The optical path for λ_1 for the light reflected from the target will essentially be the same as in the first embodiment via the dichroic mirror 221 and mirror 231 towards the receiver 241. Further the tilt angle of the dichroic plates 221 and 222 have been changed such that the once reflected light of the wavelength λ_2 is directed towards the receiver 242. This has been accomplished by resizing the distance between the plate 221 and/or by changing the tilt angles of the plates to allow the beam λ_2 reflected in plate 222 to reach the receiver passing essentially adjacent to plate 221, i.e. plate 221 will not reach in to the reflected beam from plate 222. This figure also illustrates the capability to direct the beam to the detector without a second reflecting mirror.

The dichroic plates may exhibit a wedge form in order to compensate for optical aberrations in the visual channel. This is illustrated in Fig 2 b in which the two plates 221 and 222 are shown, and the optical axis OA is indicated. The wedge form of the plates defines an angle of 0 – 30 arc seconds and will compensate for optical aberrations. It should be understood that this type of compensation may be used in the embodiment described in Fig. 1 also. The wedge form could further be used in other

embodiments alone or in combination with some other compensation for the optical aberrations caused by the plates.

- In Fig. 3 a third embodiment according to the invention is shown in which like numbers are used to indicate corresponding details. In this embodiment the aberration compensation is accomplished by the compensating plate 307. The lens system 301, the prism 302, the focusing lens 304, the reticle 305, the eyepiece 306 and the optical axis AO are similar to each other and serve the same purposes.
- 10 In this third embodiment transmitter 311, transmitting light of the wavelength λ_1 and the second transmitter 312 transmitting light of the wavelength λ_2 , are arranged in the same manner as in embodiment 1 using dichroic mirrors 313, 314 to bend the light towards the prism 302.
- 15 The optical path for λ_1 for the light reflected from the target will essentially be the same as in the first embodiment via the dichroic mirror 321 and 331 towards the receiver 341. The beam λ_2 has a beam path essentially as in Fig. 1 reflected in mirrors 322 and 332 to the receiver 342.
- 20 In this embodiment a compensating plate 307 with a tilt axis oriented 90° with respect to the tilt axis of the other plates is inserted to compensate for optical aberrations caused in the visible channel by the visible light having to transverse the plates 321 and 322.
- 25 In Fig. 4a a fourth embodiment according to the invention is shown in which like numbers are used to indicate corresponding details. The lens system 401, the prism 402, the focusing lens 404, the reticle 405, the eyepiece 406 and the optical axis AO are similar to each other and serve the same purposes.

In this forth embodiment a first transmitter 411, transmitting light of the wavelength λ_1 arranged perpendicular to the optical axis OA and the second transmitter 412 transmitting light of the wavelength λ_2 arranged coaxial to the optical axis OA, using dichroic mirror 414 to bend the light towards the prism 402.

5

The optical path for beam λ_2 is reflected by the dichroic mirror 422 in the direction of a detector 442, the tilt axis of plate 422 in this case being oriented perpendicular to the tilt axis of plate 421. This represents the third method of compensating for optical aberrations.

10

The optical path for λ_1 for the light reflected from the target will essentially be the same as in the first embodiment via the dichroic mirror 421 and 431 towards the receiver 441. Part of the beam, light having the wavelength λ_1 is reflected in the first tilted plate 421 towards a further dichroic plate 431 which reflects the beam towards a detector 441. In this embodiment the tilt axis of the second plate 422 is essentially arranged perpendicular to the tilt axis of the first plate 421, thus serving to compensate for optical aberrations in the visible channel from the first plate

15

A top view (detail of Fig 4a) is shown in Fig. 4b. The axis 451 and 450 around which the plates are tilted are shown.

20

In Fig. 5 is shown a fifth embodiment according to the invention. in which like numbers are used to indicate corresponding details. The lens system 501, the prism 502, the focusing lens 504, the reticle 505, the eyepiece 506 and the optical axis AO are similar to each other and serve the same purposes.

25

Further in Fig 5 is shown a combination of a dichroic plate 521 and a dichroic prism 522. Beams having wavelengths λ_1 and λ_2 , respectively, are transmitted from senders 511 and 512. The optical path for λ_1 for the light reflected from the target will essentially be the same as in the first embodiment via the dichroic mirror 521 and

30

67182-2002-06-13

10

531 towards the receiver 541. In this case the optical aberrations can be compensated by making the plate slightly wedge-shaped, if necessary.

5 The embodiments described are to be understood as mere examples of embodiments according to the invention. Because the dichroic plates are relatively inexpensive as compared with complicated prism systems and also because the relative compactness that can be accomplished according to the invention this contributes to an overall compact and lightweight design of apparatuses for tracking and range-finding apparatuses.

10

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191

Claims

1. Electronic distance measuring apparatus for surveying, e.g. for measuring the distance from the apparatus to an object comprising:
 - 5 a) an objective lens (101), defining an optical axis (OA),
 - b) at least two sources (111,112) of structured light for transmitting beams (λ_1, λ_2) of separate wavelengths towards said object, said beams on reflection from said object received by the objective lens (101),
 - (c) at least two receivers (141,142) arranged outside a beam path (109) as defined by
10 the objective lens (101), and adapted to receive said received beams (λ_1, λ_2) of structured light, whereat optical means comprising at least two dichroic surfaces (121a, 122a) are each arranged at a tilt angle (α_1, α_2) with respect to said axis (OA), said optical axis (OA) passing through said surfaces, at least one of said dichroic surfaces arranged on a plate (121, 122), said at least two dichroic surfaces (121a,
15 122a) adapted to reflect at least one of said received structured light beams (λ_1, λ_2), respectively, towards said receivers (141, 142).
2. Electronic distance measuring apparatus according to claim 1 such that said dichroic surfaces (121a, 122a), each are arranged on separate plates (121, 122).
3. Electronic distance measuring apparatus according to claim 1 wherein one of
20 said dichroic surfaces is arranged on a plate (621) and the other of said dichroic surface (622) is arranged in a prism (625).
4. Electronic distance measuring apparatus according to claim 1 wherein said at least two sources (111,112) of structured light for transmitting said beams (λ_1, λ_2) are adapted to transmit said light towards a light redirect member (102) arranged
25 adjacent to the objective lens (101),
5. Electronic distance measuring apparatus according to claim 4 wherein said light redirect member is a redirecting prism (102).
6. Electronic distance measuring apparatus according to claim 5 wherein said re-directing prism (102) is attached to the objective lens (101b).

7. Electronic distance measuring apparatus according to claims 2 or 3 wherein at least one mirror (131, 132) is arranged adjacent to said optical axis (AO) for redirecting at least one of the received structured light beams (λ_1, λ_2) reflected in said dichroic surfaces (121a, 122a) towards said receiver s (141, 142).
- 5 8. Electronic distance measuring apparatus according to claim 2 wherein said dichroic plates (221, 222) are wedge-formed, to provide correction for aberration errors.
9. Electronic distance measuring apparatus according to claim 2 wherein a compensating plate (307) is inserted between the focussing lens (304) and adjacent dichroic plate (322), whereat the tilt direction of said compensating plate (307) and
10 said dichroic plate (322), said tilt direction defined by an axis in the plane of the plate around which the plate is rotated with respect to said optical axis, are chosen such that the tilt directions of the two plates are arranged such as to be at an angle of approximately 90° with respect to each other.
- 15 10. Electronic distance measuring apparatus according to claim 2 wherein two dichroic plates (521, 522) are arranged such that the tilt direction of said dichroic plates, said tilt direction defined by an axis in the plane of the plate around which the respective plate is rotated with respect to said optical axis, are chosen such that the tilt directions of the two plates are arranged to be at an angle of approximately
20 90° with respect to each other.

ABSTRACT

The invention relates to an electronic distance measuring apparatus for surveying, e.g. for measuring the distance from the apparatus to an object. The apparatus comprises: a) an objective lens (101), defining an optical axis (OA), b) at least two sources (111,112) of structured light for transmitting beams (λ_1, λ_2) of separate wavelengths towards said object, said beams on reflection from said object received by the objective lens (101), (c) at least two receivers (141,142) arranged outside a beam path (109) as defined by the objective lens (101), and adapted to receive said received beams (λ_1, λ_2) of structured light. Optical means comprising at least two dichroic surfaces (121a, 122a) are each arranged at a tilt angle (α_1, α_2) with respect to said axis (OA), said optical axis (OA) passing through said surfaces, at least one of said dichroic surfaces arranged on a plate (121, 122), said at least two dichroic surfaces (121a, 122a) adapted to reflect at least one of said received structured light beams (λ_1, λ_2), respectively, towards said receivers (141, 142).

Fig. 1a




Fig. 1a

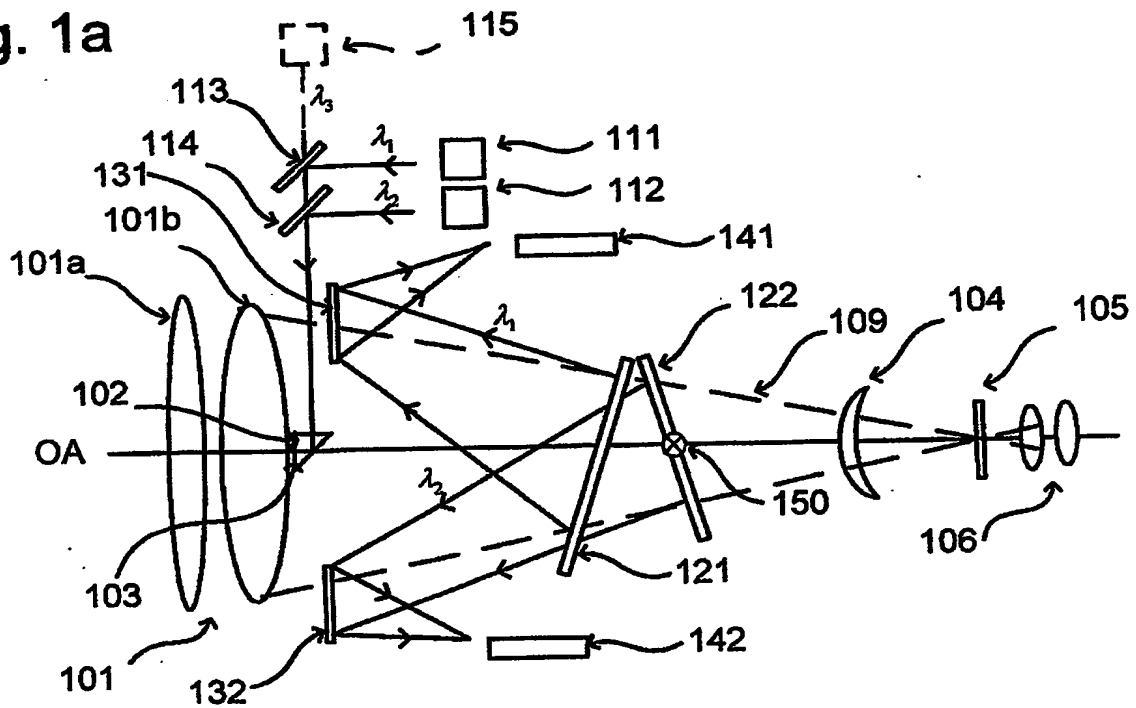


Fig. 1b

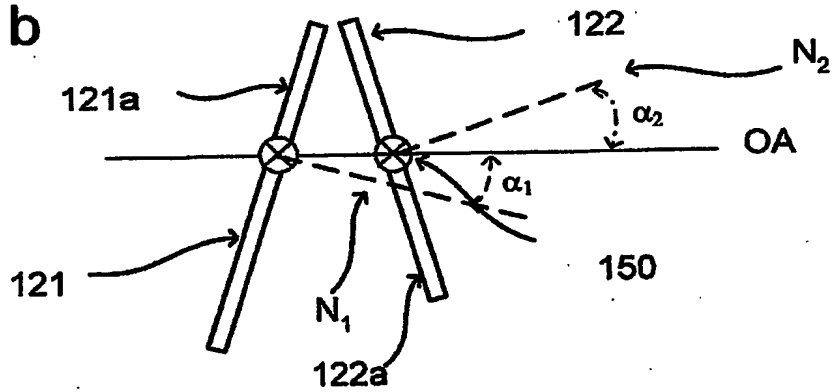


Fig. 2a

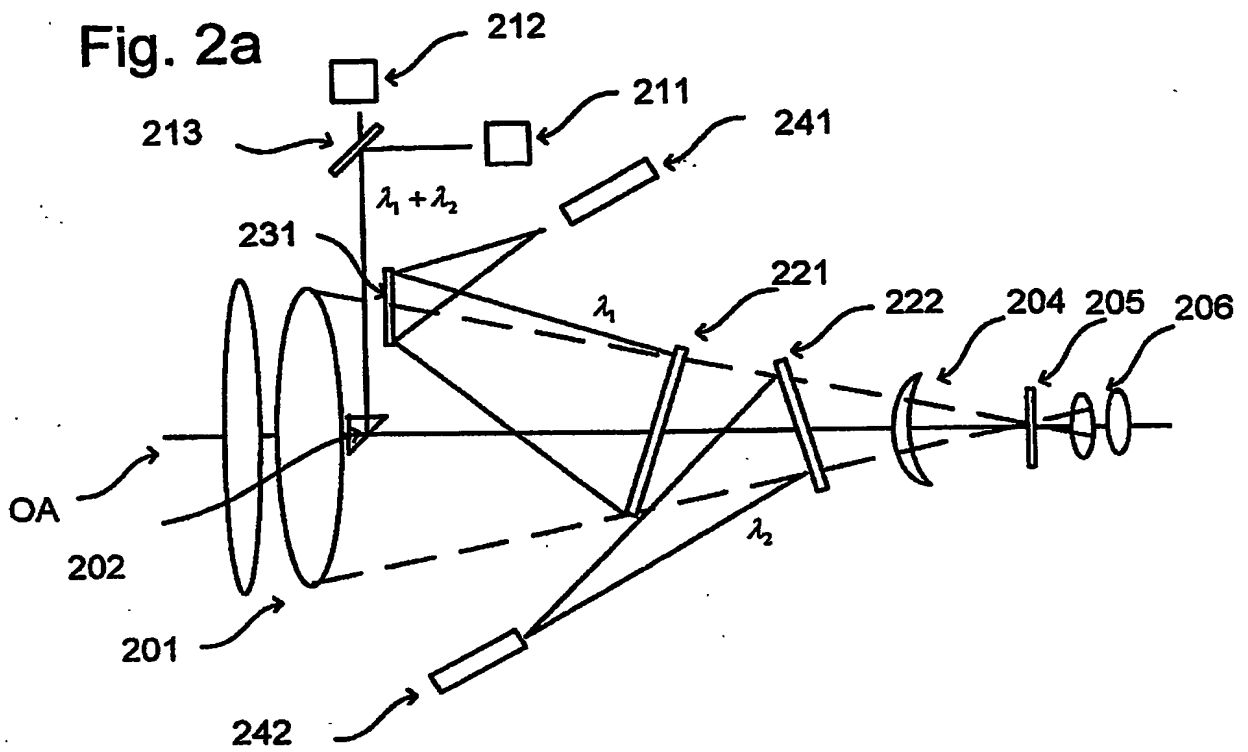


Fig. 2b

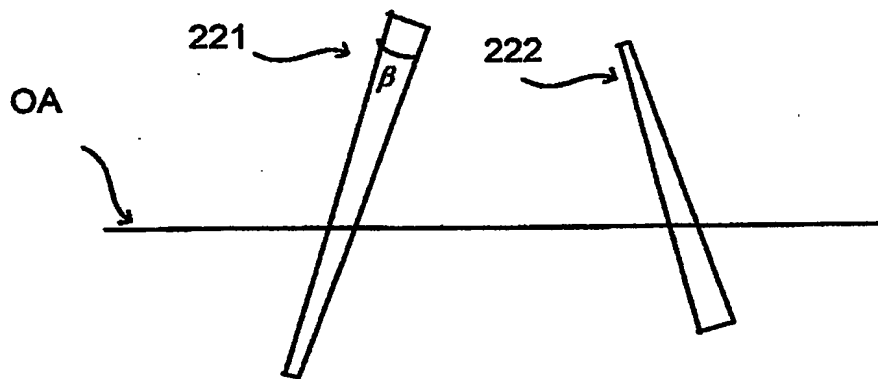


Fig. 3

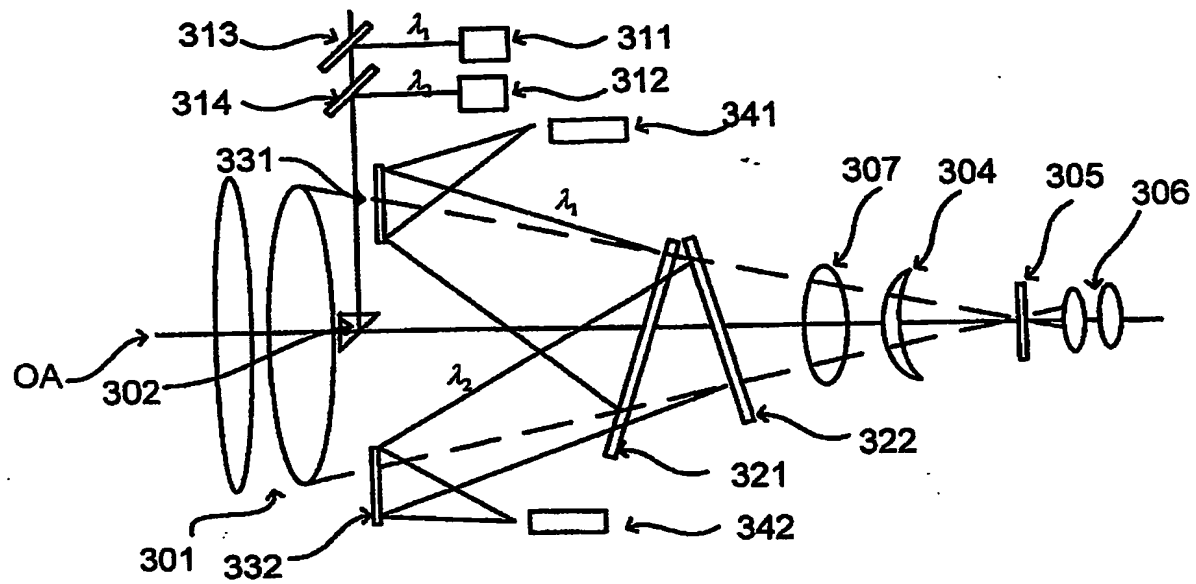


Fig. 4a

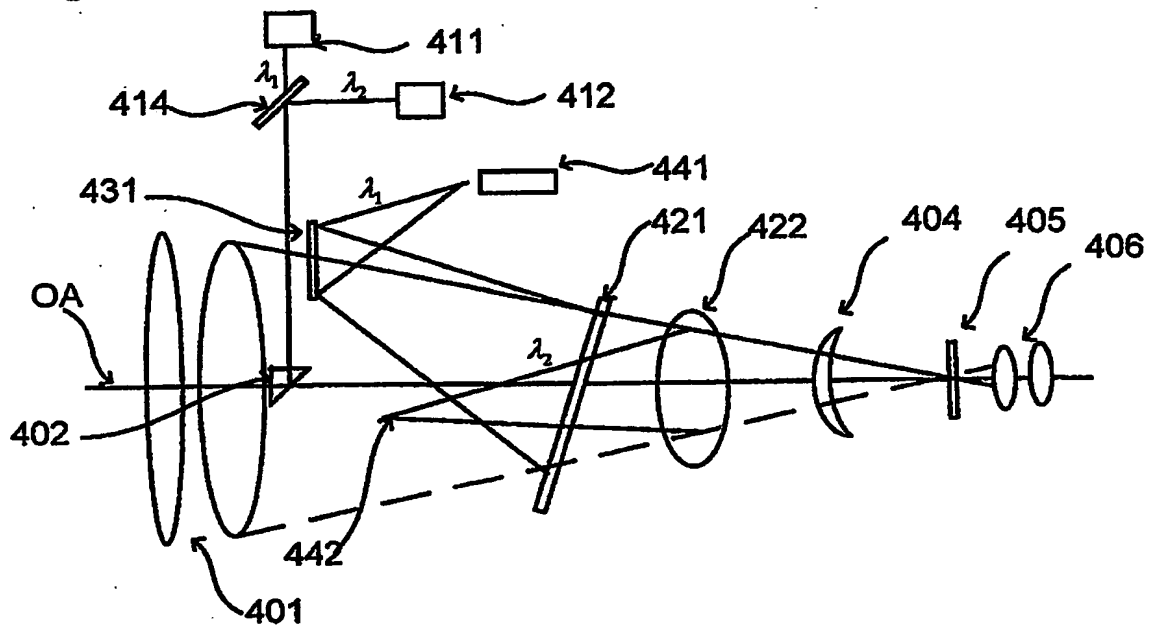


Fig. 4b


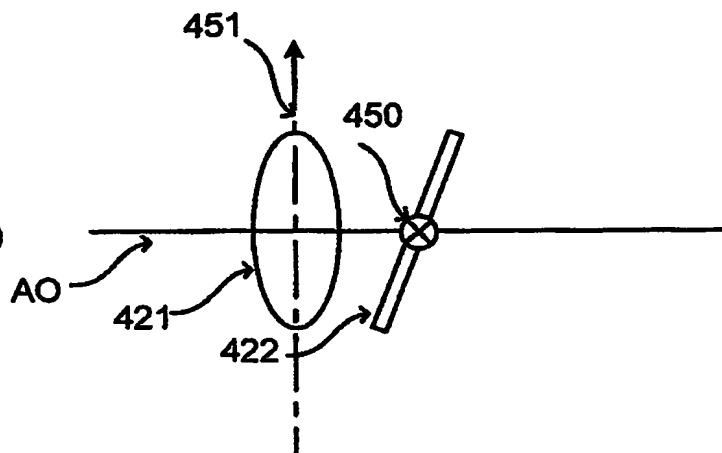


Fig. 5

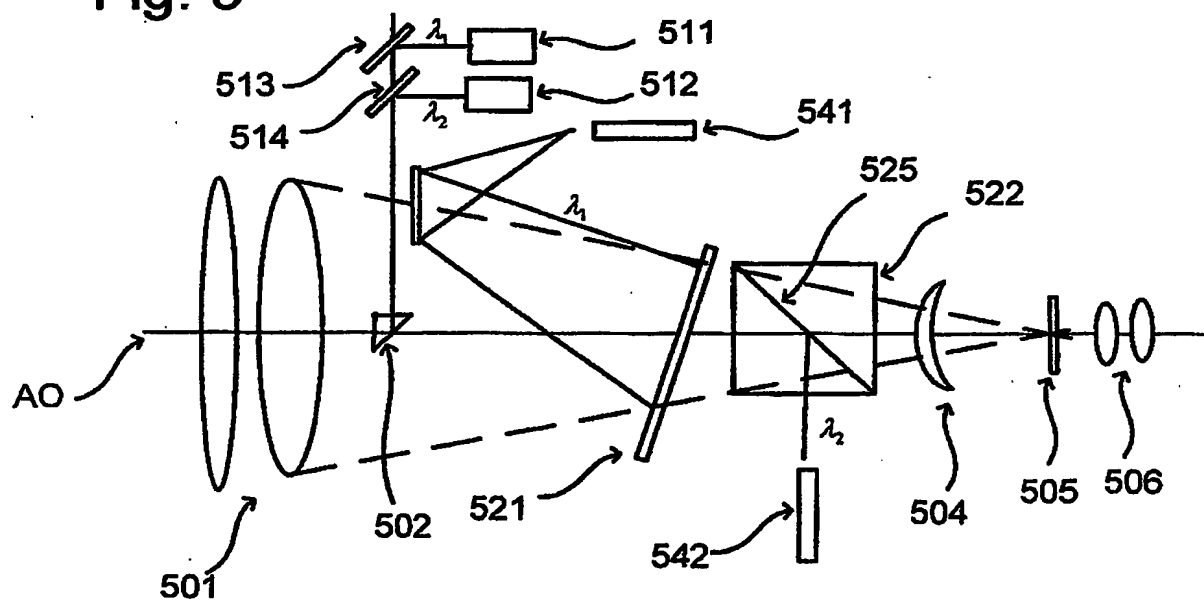

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.